

UHF PCB ANTI-METAL TAG

- Product Specifications -



- **Model:** RS-PT9525
- **Material:** FR-4 (PCB)
- **Frequency:** (US) 902-928MHz
- **Size:** 95x25mm, (Hole: D5mmx2)
- **Chip:** Alien Higgs-3, Impinj Monza 4QT
- **Protocol:** EPC Class1 Gen2, ISO18000-6C
- **Reading Range:** UP to 9.5m (based on reader/writer and installation method)
- **Read/Write Times:** ≥100,000 times
- **Operating Temperature:** -40°C~100°C
- **Certifications:** Reach Approved, RoHS Approved, CE Approved

Product Description

RS-PT9525 is a UHF RFID tag for metal asset tracking. It can be mounted with adhesive or screw, operates from -40°C to 100°C, and is waterproof and dust-proof. When within reader range, it automatically captures data such as manufacturer, production date, warranty, and technical parameters for medical and manufacturing assets.

Technical Parameters

Physical Characteristics	
Material	FR-4 (PCB)
Size	95x25mm, (Hole: D5.0mmx2)
Thickness	3.12mm without IC bump, 3.95mm with IC bump
Color	Black (Red, Blue, Green, White)
Storage Temperature	-40~+150°C (-40~302°F)
Operation Temperature	-40~+100°C (-40~212°F)
Electrical Characteristics	
Frequency	(US) 902-928MHz
Chip Type	Alien Higgs-3, Impinj Monza 4QT
Memory	EPC 96bits (Up to 480bits) , USER 512bits, TID64bits
Read/Write Times	≥100,000 times
Data Storage	10 years
Reading Distance	Up to 9.5 m (depending on the tool and the depth of insertion into the slot; based on the example of being embedded in a metal surface with no metal obstruction)
*The final read range depends on RFID Reading equipment and application environment.	

★ Key Features

- Sturdy and durable;
- Metal-resistant;
- High-temperature resistant;
- Corrosion-resistant;
- Adhesive or Screw-Mounted;
- IP68 Waterproof.



📦 Application

For tracking and management of those medical and manufactory assets, etc..



📊 Performance

Frequency: (US) 902-928MHz

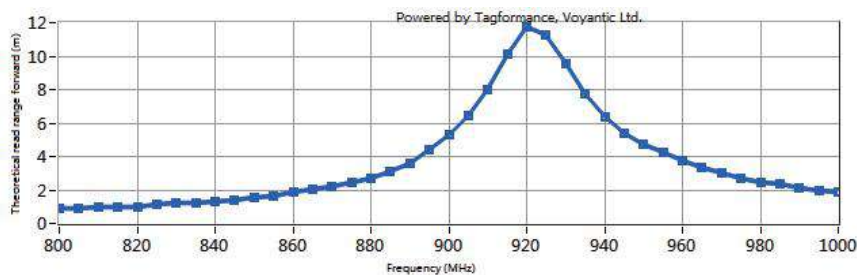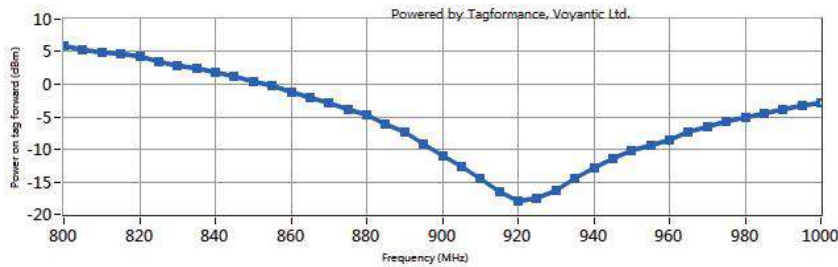

CONTACT

Ms. Edith Chen

P/W: +86 13612933572

Email: info@rfid silicone.com

Skype: live:cxjr fid

ADD: 4th Floor, Building B, Phase 1, Longzhixiang
Tiancheng Sci-Tech Park, No.27-5 Tiancheng Road,
Longhua District, Shenzhen, China 518100

