

# UHF PCB ANTI-METAL TAG

## - Product Specifications -



- **Model:** RS-PT2510
- **Material:** FR-4 (PCB)
- **Frequency:** (US) 902-928MHz
- **Size:** 25x10mm, (Hole: D2.0mmx2)
- **Chip:** Alien Higgs-3
- **Protocol:** EPC Class1 Gen2, ISO18000-6C
- **Reading Range:** UP to 3.25m (based on reader/writer and installation method)
- **Read/Write Times:** ≥100,000 times
- **Operating Temperature:** -40°C~100°C
- **Certifications:** Reach Approved, RoHS Approved, CE Approved

## Product Description

RS-PT2510 is a UHF RFID tag for access control and metal surface applications, with a read distance up to 3.25 meters. It can be mounted via screw, zip tie, adhesive, or glue. Measuring 25 × 10 × 2.0mm with two 2mm holes, it features Alien H3 chip and operates from -40 ° C to 100 ° C. Suitable for logistics, warehousing, IT, and financial services where cost and versatility are key.

## Technical Parameters

Physical Characteristics	
Material	FR-4 (PCB)
Size	25x10mm, (Hole: D2.0mmx2)
Thickness	2.0mm without IC bump, 2.6mm with IC bump
Color	Black (Red, Blue, Green, White)
Storage Temperature	-40~+150°C (-40~302°F)
Operation Temperature	-40~+100°C (-40~212°F)
Electrical Characteristics	
Frequency	(US) 902-928MHz
Chip Type	Alien Higgs-3
Memory	EPC 96bits (Up to 480bits) , USER 512bits, TID64bits
Read/Write Times	≥100,000 times
Data Storage	10 years
Reading Distance <i>*The final read range depends on RFID Reading equipment and application environment.</i>	Up to 3.25 m (depending on the tool and the depth of insertion into the slot; based on the example of being embedded in a metal surface with no metal obstruction)

## ★ Key Features

- Sturdy and durable;
- Metal-resistant;
- High-temperature resistant;
- Corrosion-resistant;
- Adhesive or Screw-Mounted;
- IP68 Waterproof.


## 📦 Application

For logistics, warehousing, IT and financial services, etc..



## 📦 Performance

Frequency: (US) 902-928MHz

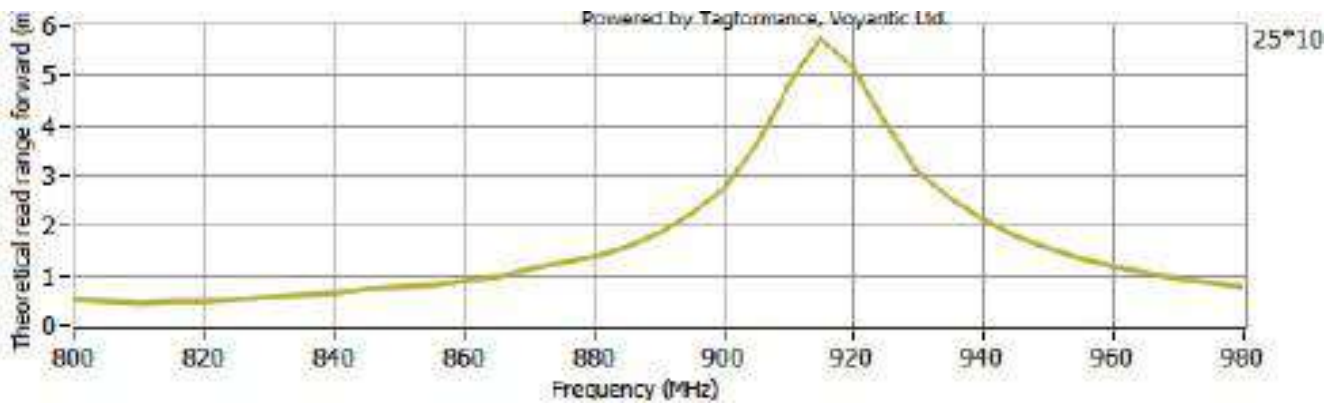

## CONTACT

Ms. Edith Chen

P/W: +86 13612933572

Email: info@rfid silicone.com

Skype: live:cxjrfid

ADD: 4th Floor, Building B, Phase 1, Longzhixiang  
Tiancheng Sci-Tech Park, No.27-5 Tiancheng Road,  
Longhua District, Shenzhen, China 518100

